

Your One Source for Energy Recovery Components



MODEL V (Modular wheel)

The Heatex Model V is a rotary wheel ideal for replacement of older wheels in the field or for convenient transport of large rotating heat exchangers.

Model V is a robust wheel, where the media is installed in an innovative spoke system. The Model V is easy to assemble and install on site.

Optimize the design with customized diameter combined with four (4) optional flute (well) heights. There are five (5) different media material available to meet all your application requirements.

Model V can be delivered with or without casing.

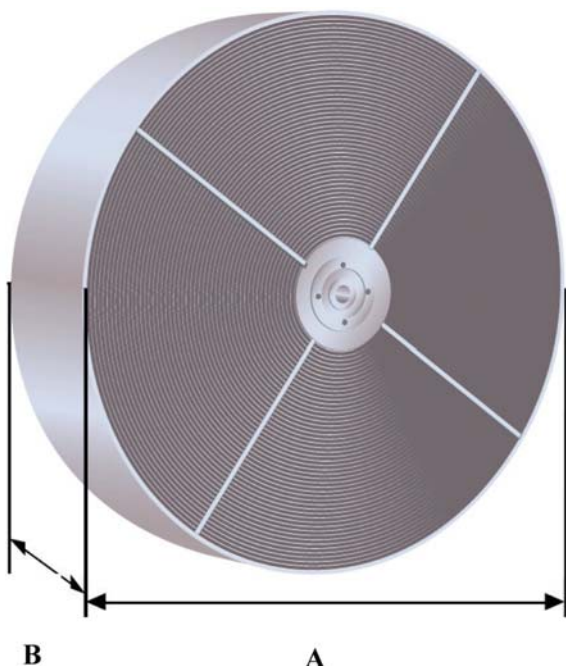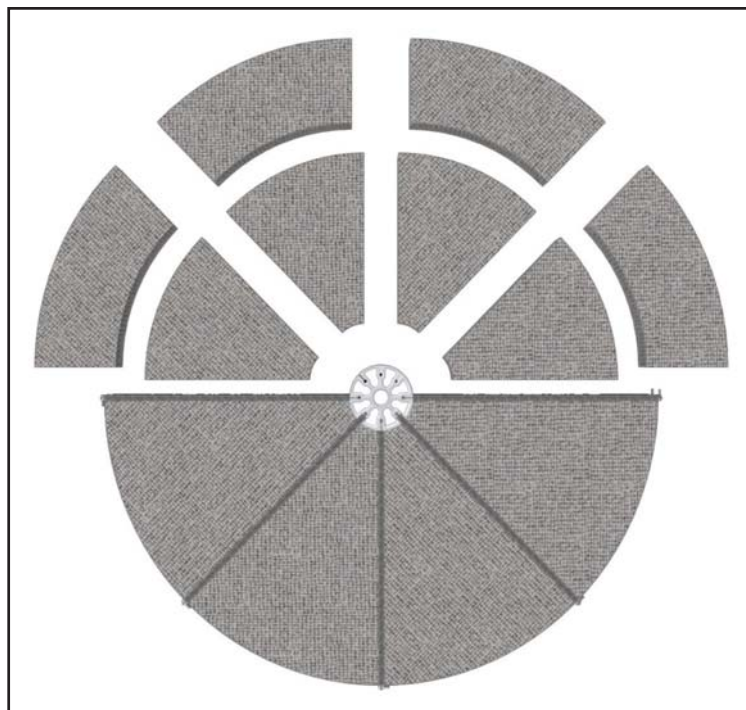

MODEL V RANGE

MEASURE IN INCHES		FLUTES PER INCH (WELL HEIGHTS)
A	B	
43 - 150	7.87	0.06 / 0.07 / 0.08 / 0.10*

* 0.10 not available for Adsorption material

MEDIA MATERIAL

Aluminum, Epoxy Coated Aluminum, Hybrid Hygroscopic, Molecular Sieve, Adsorption Material Silica Gel

STANDARD HUB

The Model V is available with internal bearings or with a fixed shaft for external bearings.

Owing to continued product development Heatex America reserves the right to introduce alterations both in design and prices without prior notice.

Heatex America

PO Box 254 • Natural Bridge Station, Virginia 24579
540.261.7411 • fax: 540.261.3105
info@heatexamerica.com • www.heatexamerica.com