
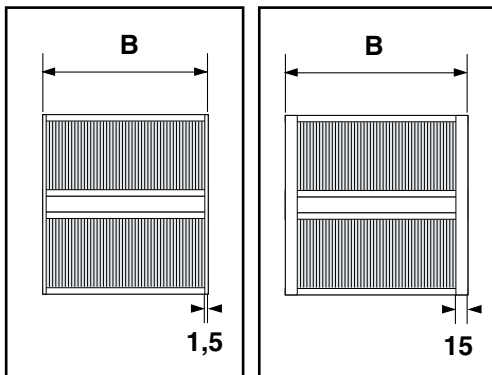


MODEL R (Rhombical)

Aluminium and aluminium with epoxy coating.

The R Model is designed for high efficiency and occupies a minimum space in built in applications. The plates in Heatex's model R are smooth, allowing dirt to pass through the channels without lodging and thus fouling the exchanger.

Heatex R is often used as cooling solution for electronics components and is a perfect product for applications where high efficiency and compact design are priorities.

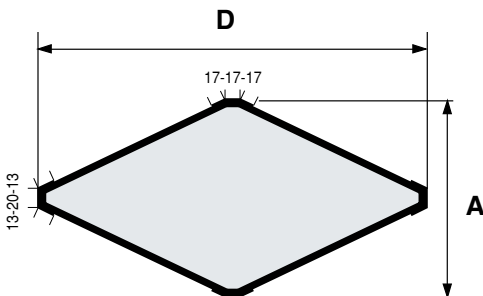

5A

5C

MODEL R RANGE

Model	Measure mm			Plate distances nominal (mm)
	A	B	D	
R	226	100-400	450	1,8

Plate material: Aluminium/Epoxy coated aluminium

Frame material: Corner profiles and endplates in aluminium.

Sealing: Siliconefree (max 90°C, 190°F)

FRAME DESIGNS

Heatex R-models are available in two standard frame designs 5A and 5C.